



EAN code  
DMD3-1: 8595188157513

Technical parameters		DMD3-1
<b>Inputs</b>		
Angle of motion detection:	140°, 4 m	
Recommended installation height:	2.5 - 3 m	
Changing the PIR sensitivity:	yes, 0 to 127 (max. sensitivity)	
PIR scan type:	single/dual	
Default setup PIR:	99 dual	
Temperature measuring:	yes, built-in temperature sensor	
Scope and accuracy of temp. measurement:	-25 to +110 °C; ± 0.3 °C	
Humidity measurement:	YES	
Humidity meas. range:	0 to 99 % RH	
Humidity meas. accuracy:	± 4 % RH	
Light Metering:	yes	
Detection angle:	± 55 °	
Measuring range:	1 - 100 000 lx	
Number of control buttons:	1	
<b>Outputs</b>		
Indication red LED:	identification DALI MASTER/communication options	
Indicating blue LED:	PIR activation	
Indication green LED RUN:	communications/unit status	
<b>Communication</b>		
Interface:	installation iNELS BUS, DALI	
<b>Power supply</b>		
From iNELS BUS:	27 V DC, -20/+10 %	
Rated current:	18 mA	
From DALI BUS:	16 V (max. 23 V)	
Rated current:	27 mA	
Dissipated power:	max. 0.5 W	
<b>Connection</b>		
Terminals:	0.3 - 0.8 mm <sup>2</sup>	
<b>Operating conditions</b>		
Operating temperature:	-20 to +55 °C	
Storing temperature:	-30 to +70 °C	
Protection degree:	IP20	
Operation position:	vertical	
Installation:	ceiling	
<b>Dimension and weight</b>		
Dimension:	Ø 76 x 73 mm	
- installation hole diameter:	60 mm	
- diameter visible:	76 mm	
Weight:	81 g	

For proper function of the detector it is necessary to eliminate all interference from heat or light sources in the sensing area.


The detector cannot be installed on an unstable or vibrating surface.

Lower mounting height will reduce the overall size of the detection zone.

The distance from the unit and the colour of the illuminated area affects the resulting value of the measured illumination by the DMD3-1 unit.

- DMD3-1 is a combined detector for ceiling mounting.
- Possibilities to use the DMD3-1:
  - motion detector
  - sensor luminescence
  - temperature measuring
  - humidity measurement
- The unit is equipped with two communication interfaces:
  - installation iNELS BUS.
  - DALI (a maximum 4 pcs of DMD3-1 or DLS3-1 units can be used on one DALI bus).
- The motion detector is used to detect people moving in the area. Using the passive scanning infrared spectrum for detection.
- Integrated luminescence sensor can be used for sensing current luminescence at the point of installation of the unit. This information can be used in tasks to maintain a constant luminescence. In space where it is possible, thanks to the contribution of natural light from the outside to adjust the artificial light, which can reduce energy consumption.
- Setting the communication interface is done using the SET button.
- The unit can be configured via the iNELS3 Designer & Manager software, which, among other things it is possible to:
  - set the desired function depending on detected motion
  - resolve jobs based on the value of luminescence
  - enable/disable the alarm LED on the detector housing
- DMD3-1 detector is designed for indoor installation and is not intended for outdoor use.
- DMD3-1 detector is powered directly via the iNELS BUS installation (nominal 27 V DC) or DALI BUS (nominal 16 V DC).

**Connection**

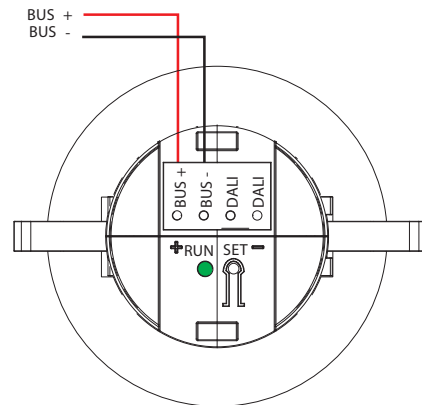

**Scanning range**

