

NEW



EAN code
SHT-7: 8595188135498

Technical parameters	SHT-7
Power supply terminals:	A1 - A2
Supply voltage:	AC 230 V / 50 - 60 Hz
Input power:	AC max. 14 VA / 2 W
Max. dissipated power (Un + terminals):	5 W
Supply voltage tolerance:	-15 %; +10 %
Real time back-up:	yes
Transition to summer /winter time:	automatic
Output	
Number of contacts:	2x changeover / SPDT (AgSnO ₂)
Rated current:	16 A / AC1
Switching power:	4000 VA / AC1, 384 W / DC
Peak current:	30 A / < 3 s
Switching voltage:	250V AC / 24V DC
Mechanical service life:	> 3x10 ⁷
Electrical service life (AC1):	> 0.7x10 ⁵
Timing circuit	
Real time reserve:	up to 3 years
Accuracy of operation:	max. ±1 s per day, at 23°C (73 °F)
Minimum triggering interval:	1 minute
Program data storage period:	10 years at minimum
Programming circuit	
Number of memory locations:	100
Program:	daily, yearly (until 2099)
Interface NFC:	daily, yearly (until 2099)
Data display:	LCD display, backlight
Other information	
Operating temperature:	-20.. +55 °C (-4 °F to 131 °F)
Storage temperature:	-30.. +70 °C (-22 °F to 158 °F)
Electrical strength:	4 kV (power supply - output)
Operating position:	any
Mounting:	DIN rail EN 60715
Protection degree:	IP10 terminals, IP40 from front panel
Overvoltage category:	III.
Pollution degree:	2
Max. cable size (mm ²):	max. 2x 2.5, max. 1x 4 with sleeve max. 1x 2.5, max. 2x 1.5 (AWG 12)
Dimensions:	90 x 35 x 64 mm (3.5" x 1.4" x 2.5")
Weight:	125 g (4.4 oz.) - without battery
Standards:	EN 61812-1, EN 61010-1

Plug-in module

EAN code:
209930603123



With battery




Without battery


Type of backup battery: CR 2032 (3V)

- Digital switch timer clock with day and year program and setting via smartphone supporting NFC transfer
- Timer switch - switching based on real time in day and week mode
- 100 memory locations for on / off setting
- OFF line setting of programs in the application
- Backup / insertion into the phone memory for transfer to the next timer switch
- two-channel design, where each channel is programmable independently of the other.
- automatic switching between winter and summer time.
- sealable transparent cover on the front panel.
- data and time backup using the battery.
- battery life - up to 3 years.
- easy replacement of the backup battery through the plug-in module, no disassembling is required.
- supply voltage: AC 230 V.
- 2-MODULE, DIN rail mounting.


Description

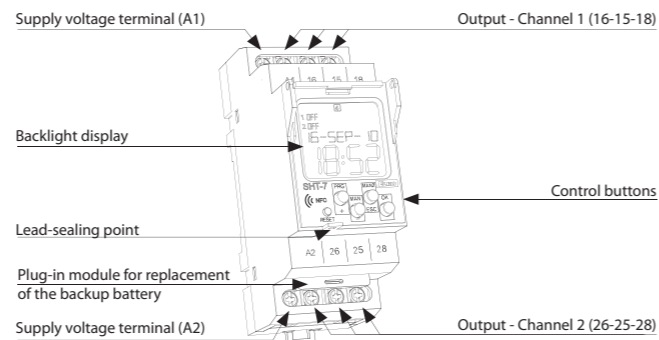





Description of items displayed on the screen

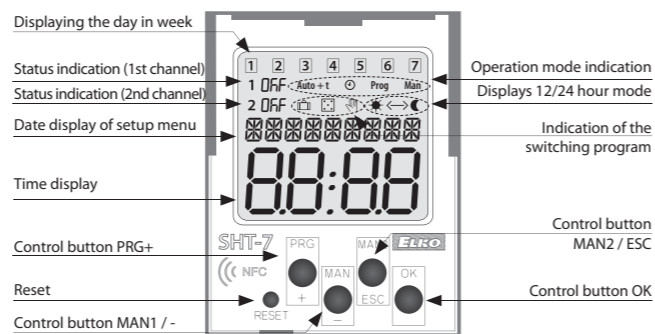

Wiring



Symbol

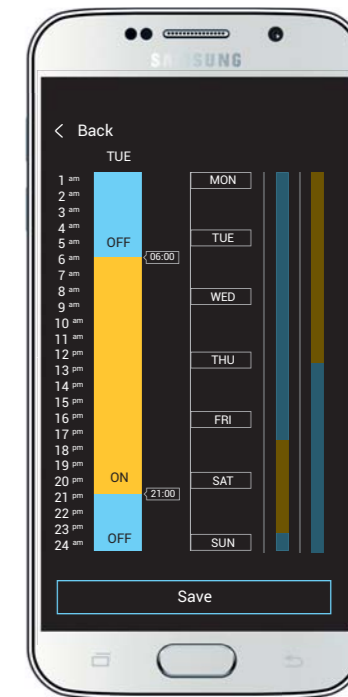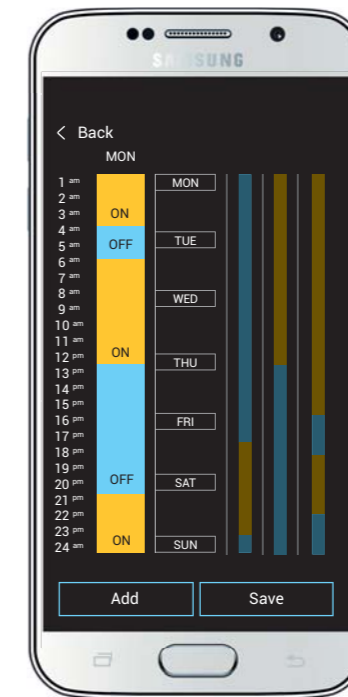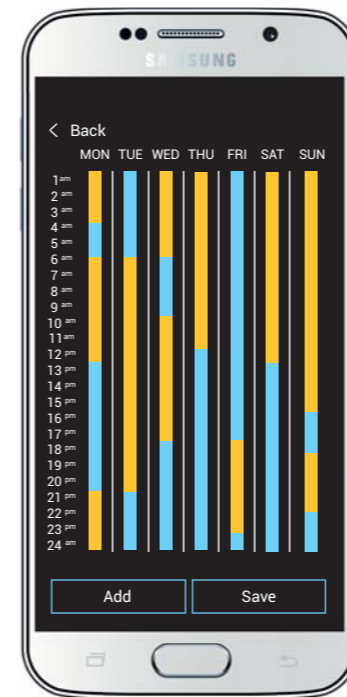

Through simple steps in the application you can set the desired on and off settings based on real time. You can copy this setting to other days, and altogether you can store up to 100 programs. The entire setup project can be saved to your smartphone and transferred to the next timer switch. The smartphone application serves not only to upload settings but also to download. The main benefit is speed and simplicity.



Near Field Communication is the way of wireless communication of two devices within a short distance of a few centimeters. A typical example of NFC is credit card payment, but now our ability to control your timing clock is also an option. You can also conveniently set it up using a smartphone and transfer these set modes to other devices, clone them or back them up.